


EVTR

Trades Entry Button

General Information

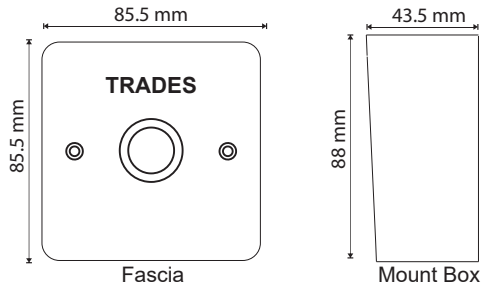

- Stainless Steel Trades Entrance Button
- IP66 Ingress Protected Push Button
- Normally Open & Closed Contacts (Timer Supplied Separately)
- Clear Wording
- Single Gang Fascia Including Surface Mount Box and Security Screws
- 88 x 88 x 43mm (inc. Surface box)

Contact Rating	AC 250V 3A
Initial Contact Resistance	<50mΩ
Operating Temperature	-20°C~70°C
Operation Life	1x10 ⁵ cycles
Relay Mode	n.c / n.o / com
Push Button Ingress Protection*	IP66



* Ensure cable connections are appropriately protected against moisture

Elite Security Products
 Unit 7, Target Park,
 Shawbank Road, Lakeside,
 Redditch B98 8YN
 Telephone: 01527 51 51 50
 Fax: 01527 51 51 43
 Email: info@espuk.com
 Web: www.espuk.com
 E&OE - Errors and omissions excepted. G20

Scan for the latest product manuals

