

# NH150 LED

## Low Energy LED Flood Light

Please read these instructions carefully prior to installation and retain them for future reference.


### IMPORTANT:

**MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN.**

**LED LAMPS ARE EXTREMELY BRIGHT. UNDER NO CIRCUMSTANCES SHOULD YOU LOOK DIRECTLY INTO AN LED BEAM. DOING SO MAY CAUSE IRREPARABLE DAMAGE TO THE EYE**

### INSTALLATION / WIRING

- Remove the back plate bracket by undoing the securing screw on the bottom of the back plate.
- Choose the desired installation location and mark the fixing points through the back plate bracket. Pre drill the holes taking care not to damage any hidden pipes or cables.
- Pass the incoming cable in through the angled hole and grommet within the back plate.
- Fix the back plate bracket to the surface using suitable fixings / plugs for the surface.
- Wiring to be completed as Fig.1

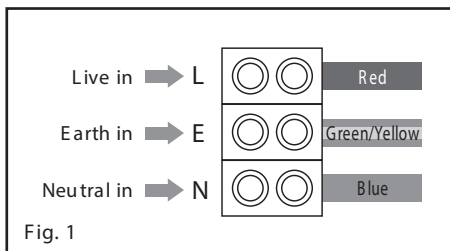

**IMPORTANT NOTE**  This product must be Earthed

### SPECIFICATIONS

Power source	220 - 240VAC/50Hz
Power consumption	16w (operational)
Light output	15 00 lumens
Colour	5000K cool white
LED usage life	40,000 hours (55 years @ 2 hours/day)
Weatherproof	Suitable for external use

### LED LAMPS ARE NON REPLACEABLE

Do not attempt to access / maintain the LED's. They are non replaceable and any contact may damage the LED's.

Elite Security Products  
Unit 7, Target Park, Shawbank Rd  
Lakeside, Redditch B98 8YN



Telephone: 01527 515150  
Technical Support: 01527 515145  
email: info@espuk.com  
G20

www.espuk.com