

D4020WH & D4620WH

Duceri Mains Only Surface Circular Bulkhead 14W CCT LED IP65 White

GENERAL INFORMATION

Our products are designed to comply with the recommended codes of practice for emergency lighting of premises and be installed by competent person in accordance with the relevant wiring regulations.

LUMINAIRE INFORMATION

Rated Input Supply: AC220 to 240V, 50Hz
Rated Output Power: 144 x SMD 2835
Operating Temperature: 0 to 45°C
Operating Relative Humidity: Less than 90%

Warning

- This product must be disconnected from the circuit if subjected to any high voltage or insulation resistance testing. Irreparable damage will occur if this instruction is not followed.

General

The LEDs fitting in this product are non-replacable. The unit should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist. Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the fitting.

General Instruction

These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.

SAFETY


- Installation of this luminaire should only be carried out by a qualified electrician or competent person to the current IEE Wiring Regulations.
- Please isolate mains prior to installation/maintenance
- Check the total load on the circuit (including when this luminaire is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker.
- Please note the IP (Ingress of Protection) rating of this luminaire when deciding the location for installation.



The latest product manuals and software is available online:
https://www.espuk.com/technical_support

Installation

- Switch off the electrical circuit on the consumer unit.
- Remove Circular Diffuser
- Using a screwdriver pry away clip to release the gear tray
- Mark the Location of the fixing holders and drill the holes ensuring not to infringe with any joints, gas, water pipes or electrical cables, and mount the fitting.
- Set the Colour Temperature using the below CTA guide.
- Connect the L, N & E to the terminal's on the gear tray
- Close the gear tray until the clip clicks in place, and reinstall the gear tray.

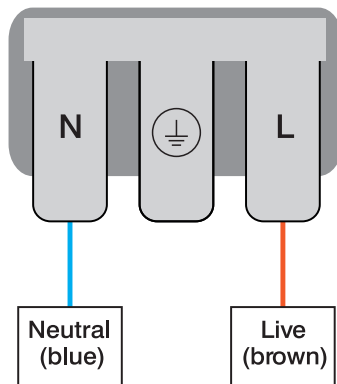

CCT Adjustment

Using the dipswitch on the gear tray set the switch to the desired colour temperature

