

# Instructions


# BTB

The BTB is not supplied with a backbox as it can be used with MOST double backboxes over 25mm deep. To accept cable glands the backbox needs to be 35mm deep including metal clad surface types and plastic plasterboard liner boxes.

The unit should be mounted at a height of 900mm to 1200mm from the centre line to the finished floor level to comply with the requirements of Building Regulations Document M (Access for the Disabled).

When flush mounting use the backbox manufacturers recommended cut out.

Once the outstation is mounted, the supplied sign should be placed adjacent to the outstation to give instructions and identify the point.

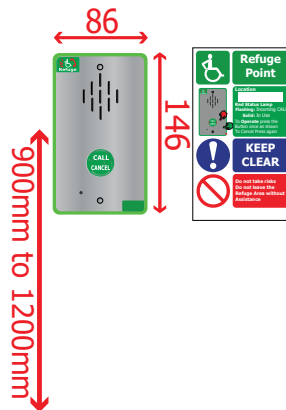

**ESP**

**UK  
CA** **CE**



●●●●● ScolmoreGROUP

Elite Security Products UK, Unit 7 Target Park, Shawbank Road, Lakeside, Redditch, Worcestershire, B98 8YN

Tel +44(0)1527 515 150, Fax +44(0)1527 150 143; Email info@espuke.com

Registered in England Number Company Registration No: 02769392, VAT Registration GB614686525

For more product information please visit [www.espuke.com](http://www.espuke.com)

E&OE - Errors and omissions excepted.K21

## Connections

