


## Manual 72102 NFC



### Connection





### Technical data

Supply voltages	230 V, 50/60 Hz
Switching capacity	16 A / 250 V~ at cosφ=1
Contact material	AgSnO <sub>2</sub>
Type of protection	IP 20
Ambient temperature	-30T55
Mode of operation	1 BSTU
Degree of contamination	2
Rated surge voltage	4 kV
Standard	DIN EN 60730-1 / DIN EN 60730-2-7

LED (230V) 200W    LED (230V) 200W


### Battery

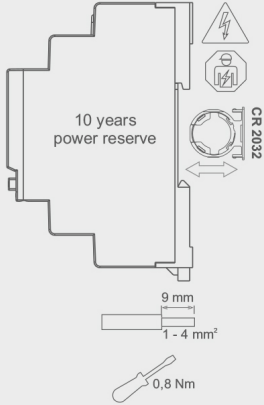



Programmable via NFC on android with Sangamo Connect App [Google Play](#)

**WARNING:**  
 \* The installation and assembly of electrical equipment must be only carried out only by a skilled Person!  
 Otherwise fire danger or danger of an electric shock exists!  
 \*\* Disconnect the mains power supply prior to installation and/or disassembly!  
 \*\*\* Connect the supply voltage/frequency as stated on the product!

**Sangamo Limited**  
 Industrial Estate, Port Glasgow,  
 Renfrewshire, PA14 5XG  
 Tel: 01475 745131  
 Fax: 01475 600370  
 Email: [enquiries@sangamo.co.uk](mailto:enquiries@sangamo.co.uk)  
 Web: [www.sangamo.co.uk](http://www.sangamo.co.uk)

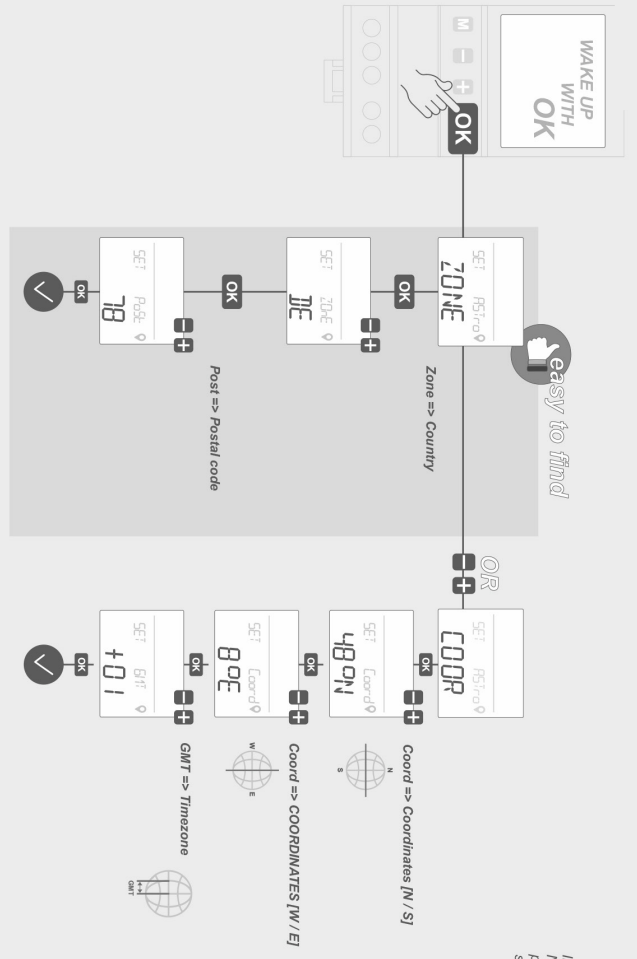

### Manual switching

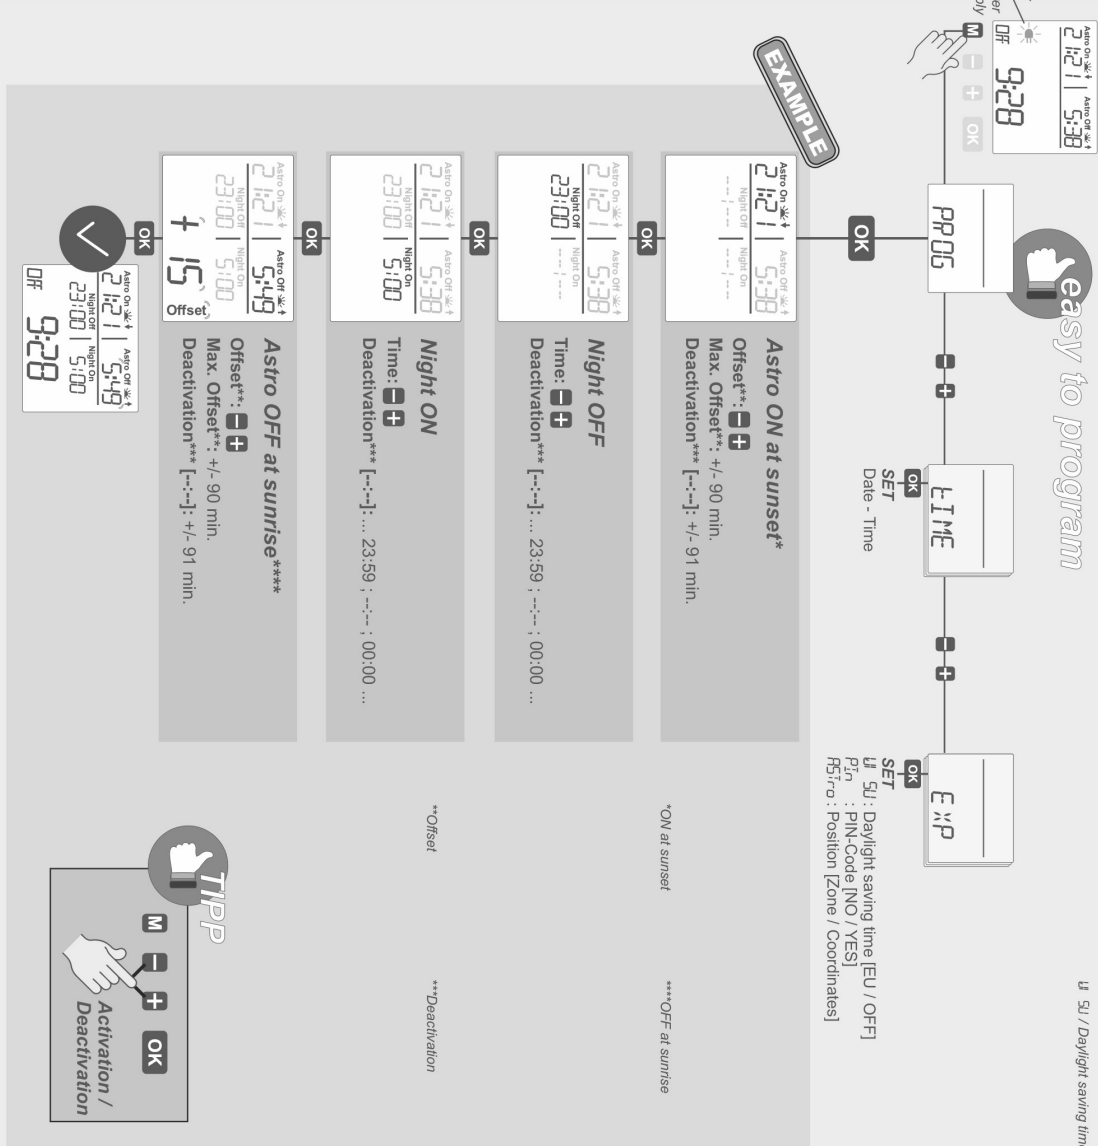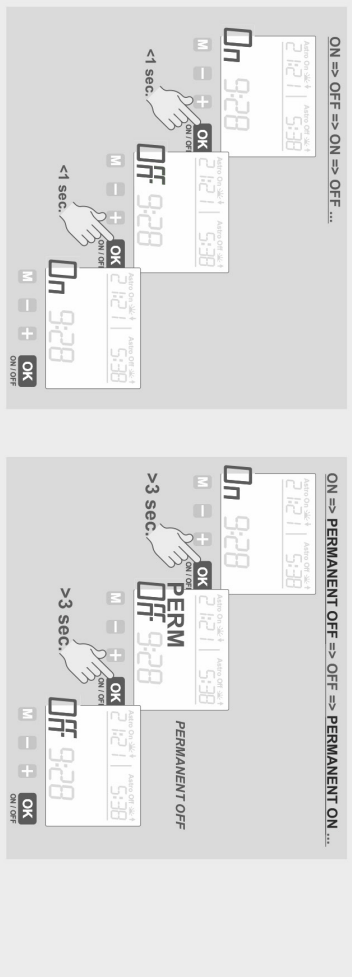

**TIPP**

Activation / Deactivation