


Product Code: CHOICE PR3n

Description: 3 Channel Programmer

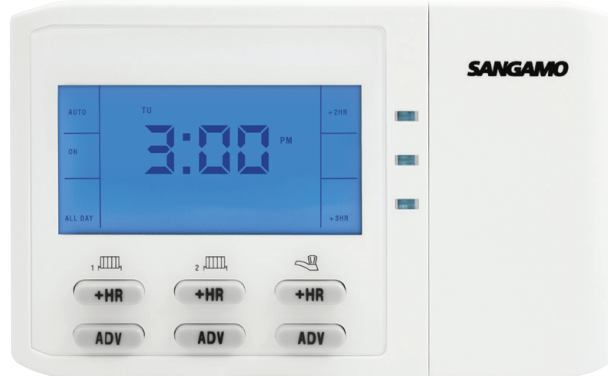

General Information

Dimensions (mm)	140 x 87 x 37
Display	Backlit LCD
Clock	12 hour am/pm, 1 minute resolution
Timing Accuracy	±1.5 Second / Day
Materials	Thermoplastics, Flame Retardant
Mounting	Surface Only
Heating System	Pumped Only
Warranty (Years)	3

Outputs

Number of Outputs	3
Relay/Contact Type	1B, Micro-Disconnection
Relay Voltage - Maximum (AC)	230
Output Relay Resistive Load Rating (A)	2
Output Relay Inductive Load Rating (A)	1
Load Rating Comment	Per Channel
Output Type	Switched Live

Programming

Programming Schedule	24 Hour, 5/2 Day and 7 Day Programmable
Available Operations	2 or 3 ON/OFF Periods
Modes Available	On, Off, Auto, All Day
Pre-Programmed Schedule	Yes
Summer/Winter Time Change	Yes (Automatic)
Holiday Mode	Yes
Programme Resolution (Mins)	10
Selectable Boost Durations	1,2 or 3 Hour Boost

Supply & Power

Supply Voltage (V AC)	100 - 240
Wiring Type	Fixed wiring only
Global Selections	Normally Open & Normally Closed (each per channel); Switched Live
Battery Type	Lithium Cell CR2032
IEC Protection Class	Class II

Environment

Ingress Protection	IP30
Operating Temperature (°C)	0 to +40

Additional Information Double Insulated Construction

Features

- 24 hour, 5/2 day and 7 day Selectable
- 2 or 3 ON/OFF Periods Selectable
- 1, 2 or 3 Hour Boost
- Advance to Next Programmed Event
- Automatic Summer/Winter Time Change
- Standard Wall Plate - Simple Plug in and Replace
- Pumped or Gravity System Selectable

