

Product Code: D1011WH

Description: 5W LED IP65 Emergency Bulkhead



General Information

Dimensions (mm)	352 x 110 x 60
Finish	White
Materials	Polycarbonate Housing
Mounting	Ceiling or Wall
Weight (Kg)	0.75
Warranty (Years)	3

Supply & Power

Supply Voltage (V AC)	220 - 240
Frequency (Hz)	50
Electrical Safety	Charge & Discharge Protection
Power Consumption (W)	5

Environment

Ingress Protection	IP65
Operating Temperature (°C)	0 to +45
Relative Humidity Resistance (%)	<90


Luminaire Output

Colour Temperature (K)	5500
Mains Luminous Flux (Lm)	208
Emergency Luminous Flux (Lm)	190
LED Lamp Type	28 x SMD 2835

Emergency Information

Emergency Operation	Maintained or Non-Maintained
Status Indication	Green LED
Replacement Battery	D001
Battery Specification	3.2V 1500mAh LiFePO4
Battery Duration (Hours)	3

Standards BS EN 60598-2-22

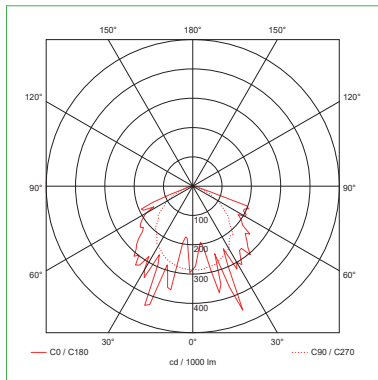

Mains

Escape Route 1 lux min

Mounting Height	Axial/Wall	Axial/Axial	Transverse/Axial	Transverse/Transverse	Transverse/Wall
2.0m	2.8	6.8	7.8	8.9	3.5
2.5m	3	7.5	8.3	9.2	3.5
3.0m	3.1	8	8.8	9.6	3.7

Illuminance values based on a maintenance factor of 0.8
Photometric spacing data 1 Lux (centre to centre in metres on emergency escape routes)