

Product Code: D5010WH

Description: 3W LED IP65 Emergency Maintained Rectangle Bulkhead



General Information

Dimensions (mm)	352 x 110 x 60
Finish	White
Materials	Polycarbonate Housing
Mounting	Ceiling or Wall Mounted
Weight (Kg)	0.6
Warranty (Years)	3

Supply & Power

Supply Voltage (V AC)	220 - 240
Frequency (Hz)	50
Electrical Safety	Charge & Discharge Protection
Power Consumption (W)	3
Power Consumption (A)	0.03

Environment

Ingress Protection	IP65
Operating Temperature (°C)	0 to +45
Relative Humidity Resistance (%)	<90

Features Self-Test Facility


Luminaire Output

Colour Temperature (K)	5500
Mains Luminous Flux (Lm)	121
Emergency Luminous Flux (Lm)	119
LED Lamp Type	16 x SMD 2835


Emergency Information

Emergency Operation	Maintained or Non-Maintained
Status Indication	Green LED
Replacement Battery	D001
Battery Specification	3.2V 1500mAh LiFePO4
Battery Duration (Hours)	3

Standards BS EN 60598-2-22, BS EN 62034

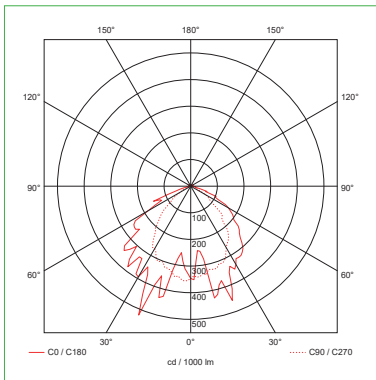

Mains

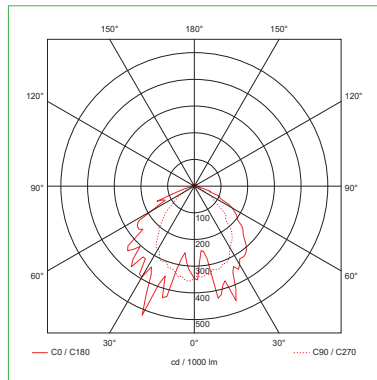

Emergency

Escape Route 1 lux min

Mounting Height	Axial/ Wall	Axial/ Axial	Transverse/ Axial	Transverse/ Transverse	Transverse/ Wall
2.0m	2.2	5.3	6.1	7	2.7
2.5m	2.4	5.9	6.8	7.8	2.9
3.0m	2.5	6.5	7.4	8.4	3

Illuminance values based on a maintenance factor of 0.8
Photometric spacing data 1 Lux (centre to centre in metres on emergency escape routes)