


Product Code: MAGPRO-2i2O

Description: 2 Input 2 Output Module with Isolator

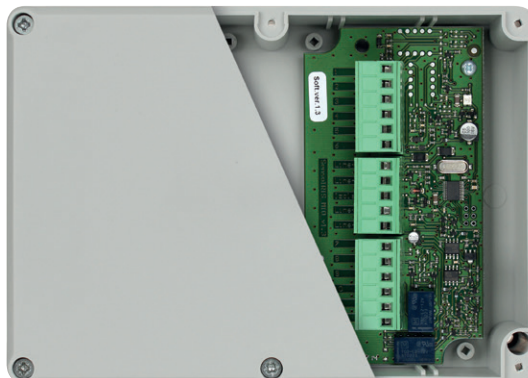

General Information

Dimensions (mm)	126 x 176 x 57
Weight (Kg)	0.23
Warranty (Years)	3

Supply & Power

Operating Voltage (V DC)	15 - 32
Cable Size (mm²)	0.4 - 2.0
Current consumption in STAND-BY mode (µA)	235 (@27V DC)
Nominal Current Consumption (µA)	260 (@27V DC)
Current consumption with 1 LED ON (mA)	3.5
Current consumption with 2 LED ON (mA)	7

Inputs & Outputs

Number of Inputs	2
Type of Inputs	Monitored
Zones	16
Number of Outputs	2 (Double Pole Relays)
Output Relay Rating	40V DC @ 1A

Communication

Protocol Type	Custom (Closed)
---------------	-----------------

Environment

Ingress Protection	IP40
Operating Temperature (°C)	-10 to +60
Relative Humidity Resistance (%)	93 (±3) (@40°C)

Supplied 4 x 56k Ohm Resistors

Additional Information Can be used to interface 2 x 3rd party devices to create conditions such as Class Change
Used to switch equipment in conditions such as "Common Fire"
Supplied with 56k End of Line Resistors

Standards BS EN 54-17, BS EN 54-18

Features

Loop Powered

