


Product Code: B1ABEDKIT

Description: Beacon Assist Call Bedroom Kit

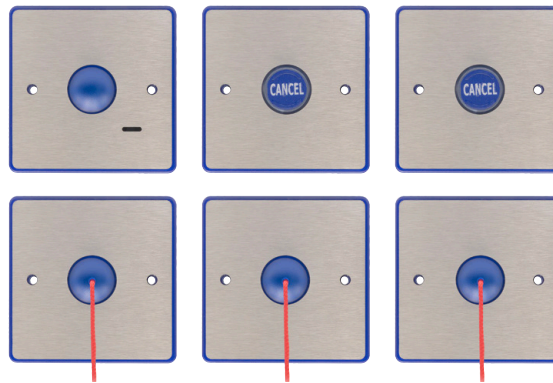

Component 1 Description

B1APCM - Pull Cord Module

Quantity

3

Component 2 Description

B1AM - Alert Module

Quantity

1

General Information

Dimensions (mm)	86 x 86 x 22
Finish	Brushed Steel
Materials	Stainless Steel & Polycarbonate
Mounting	Surface or Flush
Weight (Kg)	0.6

Supply & Power

Cable Size (mm ²)	1 - 1.5
Connection Type	1 x 2 Core Radial

Programming

Adjustment Type	Pull Cord
-----------------	-----------

Communication

Maximum Communication Range (m)	500 (point to point)
---------------------------------	----------------------

Inputs & Outputs

Input Lines	1
Alarm Zone End of Line (Resistance)(Ω)	10k
Line Outputs	Single Line

Environment

Storage Temperature (°C)	
--------------------------	--

General Information

Dimensions (mm)	86 x 86 x 22
Finish	Brushed Steel
Materials	Stainless Steel & Polycarbonate
Mounting	Surface or Flush
Indication	Blue 'Halo'
Cable Size (mm ²)	1 - 1.5
Connection Type	1 x 2 Core Radial
Maximum Communication Range (m)	500 (point to point)
Input Lines	1
Alarm Zone End of Line (Resistance)(Ω)	10k
Line Outputs	Single Line
Weight (Kg)	0.6

Component 3 Description

B1ACM - Pull Cord Cancel Module

Quantity

2

General Information

Dimensions (mm)	86 x 86 x 22
Finish	Brushed Steel
Materials	Stainless Steel & Polycarbonate
Mounting	Surface or Flush
Indication	Blue 'Halo'
Cable Size (mm ²)	1 - 1.5
Connection Type	1 x 2 Core Radial
Adjustment Type	Single Cancel Button
Maximum Communication Range (m)	500 (point to point)
Input Lines	1
Alarm Zone End of Line (Resistance)(Ω)	10k
Line Outputs	Single Line
Weight (Kg)	0.6

Warranty Years 2

Additional Information The kit requires the B1A4ZM (Assistance Alarm 4 Zone Module) or Beacon Master Station to operate





Technical Specification



Product Code: B1ABEDKIT

Description: Beacon Assist Call Bedroom Kit

