

Product Code: D1000WH

Description: 3W LED IP65 Emergency Rectangle Bulkhead



General Information

Dimensions (mm)	225 x 105 x 50
Finish	White
Materials	Polycarbonate Housing
Mounting	Ceiling or Wall
Weight (Kg)	0.5
Warranty (Years)	3

Supply & Power

Supply Voltage (V AC)	220 - 240
Frequency (Hz)	50
Electrical Safety	Charge & Discharge Protection
Power Consumption (W)	3

Environment

Ingress Protection	IP65
Operating Temperature (°C)	0 to +45
Relative Humidity Resistance (%)	<90

Features Hinged Lid to Assist Installation
Legend Included


Luminaire Output

Colour Temperature (K)	5500
Mains Luminous Flux (Lm)	151
Emergency Luminous Flux (Lm)	107
LED Lamp Type	12 x SMD 2835


Emergency Information

Emergency Operation	Maintained or Non-Maintained
Status Indication	Green LED
Replacement Battery	D001
Battery Specification	3.2V 1500mAh LiFePO4
Battery Duration (Hours)	3

Standards BS EN 60598-2-22

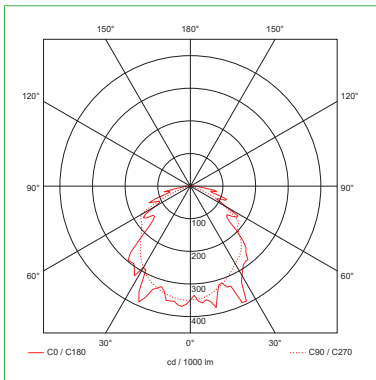

Mains



Emergency

Escape Route 1 lux min

Mounting Height	Axial/Wall	Axial/Axial	Transverse/Axial	Transverse/Transverse	Transverse/Wall
2.0m	2.5	6.5	6.4	6.4	2.2
2.5m	2.5	7	6.6	6.3	2.2
3.0m	2.6	7.2	6.9	6.5	2.7

Illuminance values based on a maintenance factor of 0.8
Photometric spacing data 1 Lux (centre to centre in metres on emergency escape routes)

