


Product Code: D2000WH

Description: 4W LED Emergency Flush Bulkhead

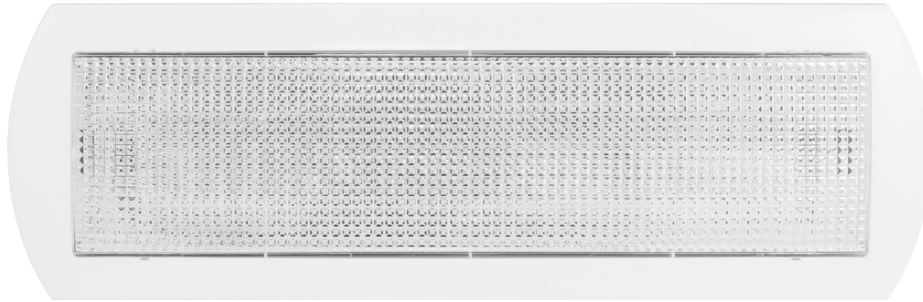

General Information

Dimensions (mm)	387 x 125 x 80
Cutout Dimensions (mm)	340 x 90
Finish	White
Materials	Polycarbonate Housing
Mounting	Recessed
Weight (Kg)	1.85
Warranty (Years)	3

Supply & Power

Supply Voltage (V AC)	220 - 240
Frequency (Hz)	50
Electrical Safety	Charge & Discharge Protection

Environment

Ingress Protection	IP20
Operating Temperature (°C)	0 to +40
Relative Humidity Resistance (%)	<90


Standards BS EN 60598-2-22

Luminaire Output

Colour Temperature (K)	5500
Mains Luminous Flux (Lm)	131
Emergency Luminous Flux (Lm)	105
LED Lamp Type	30 x SMD 2835

Emergency Information

Emergency Operation	Maintained or Non-Maintained
Status Indication	Green LED
Replacement Battery	D001
Battery Specification	3.2V 1500mAh LiFePO4
Battery Duration (Hours)	3

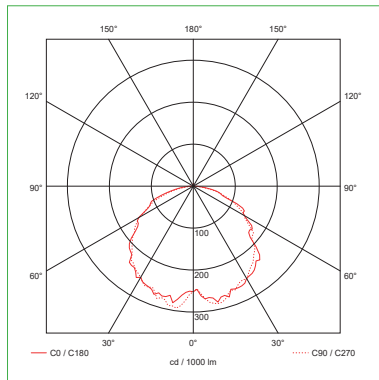

Mains

Escape Route 1 lux min

Mounting Height	Axial/Wall	Axial/Axial	Transverse/Axial	Transverse/Transverse	Transverse/Wall
2.0m	2.5	6.3	6.3	6.4	2.4
2.5m	2.5	6.7	6.7	6.8	2.5
3.0m	2.5	7	7	7	2.6

Illuminance values based on a maintenance factor of 0.8
Photometric spacing data 1 Lux (centre to centre in metres on emergency escape routes)

